


Specifications


Model	Rated Load (N)	Speed(mm/s) ±10%		Current (A)				IP Rating	Material
				12V		24V			
		No-load	Load	No-load	Load	No-load	Load		
SL-LA-35-A	1200	4.0	2.0	0.6	3.0	0.4	3.0	IP56	Aluminum Alloy/ Stainless Steel
SL-LA-35-B	2500	7.0	5.0	0.6	3.0	0.4	3.0		
SL-LA-35-C	1500	15.0	13.0	0.6	3.0	0.4	3.0		
SL-LA-35-D	600	28.0	25.0	0.7	3.0	0.5	3.0		

Dimension

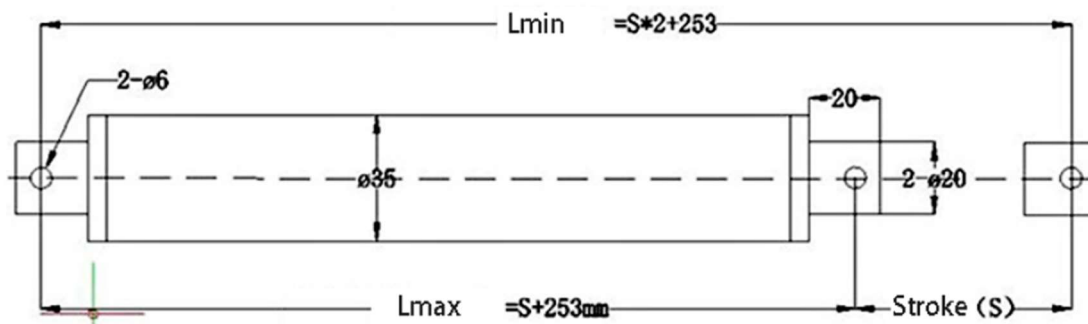

Stroke	Close Length	Open Length
50mm	303mm	353mm
100mm	353mm	453mm
150mm	403mm	553mm
200mm	453mm	653mm
250mm	503mm	753mm
300mm	553mm	853mm
350mm	603mm	953mm
400mm	653mm	1053mm
450mm	703mm	1153mm

Connector Options

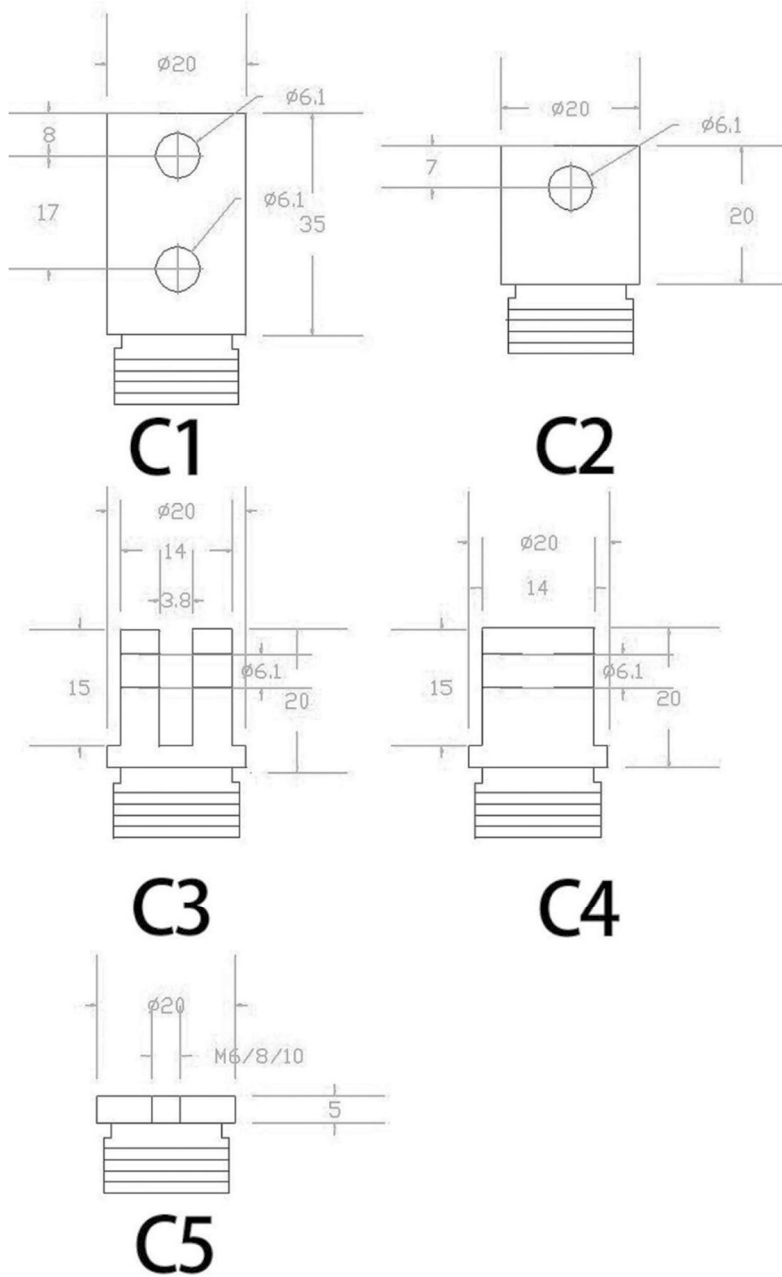

Support

Email: sales@fandeei.com

T/WhatsApp: +8615902990387