



Product Parameters

Name: Linear Actuator

Model: SL-LA-32

Housing Material: Aluminum alloy

Stroke Rod Material: Stainless steel

Speed Range: 4-20mm/s

Max Force: 1100N

Stroke Range: 50mm~1000mm

Limit Switch: External limit, non-adjustable

Rated Voltage: 12VDC/24VDC

IP Rating: IP56

Operational Temperature: -26°C/85°C


Operating Noise: < 50dB

Certifications: CE

Specifications

Model	Rated Load (N)	Speed(mm/s) ±10%		Current (A)				Self-Lock
				12V		24V		
		No-load	Load	No-load	Load	No-load	Load	
SL-LA-32-A	1100	4.0	3.0			0.3	2.0	No
SL-LA-32-B	700	8.0	6.0			0.3	2.0	No
SL-LA-32-C	300	12.0	10.0			0.3	2.0	Yes
SL-LA-32-D	150	24.0	22.0			0.3	2.0	No
SL-LA-32-E	700	5.0	4.0	0.3	2.0			No
SL-LA-32-F	350	10.0	8.0	0.3	2.0			Yes
SL-LA-32-G	200	25.0	23.0	0.3	2.0			No

Dimension

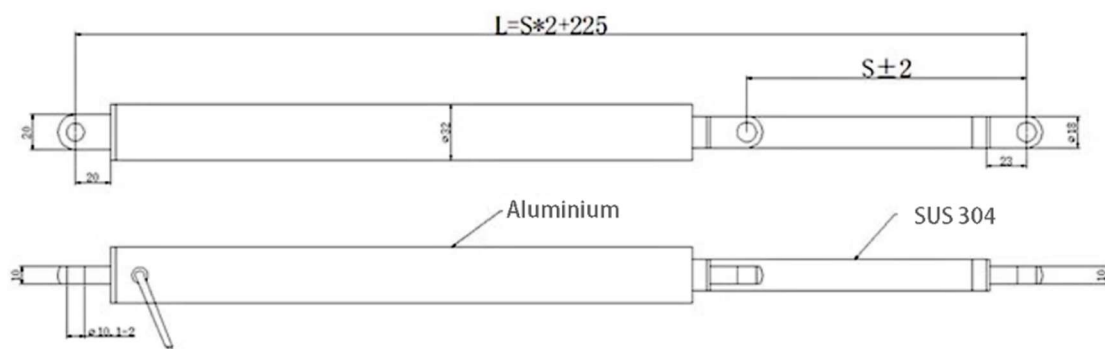


Stroke	Close Length	Open Length
10mm	235mm	245mm
50mm	275mm	325mm
100mm	325mm	425mm
150mm	375mm	525mm
200mm	425mm	625mm
300mm	525mm	825mm
350mm	575mm	925mm
400mm	625mm	1025mm
450mm	675mm	1125mm
500mm	725mm	1225mm


Connector Options




Connector ①:

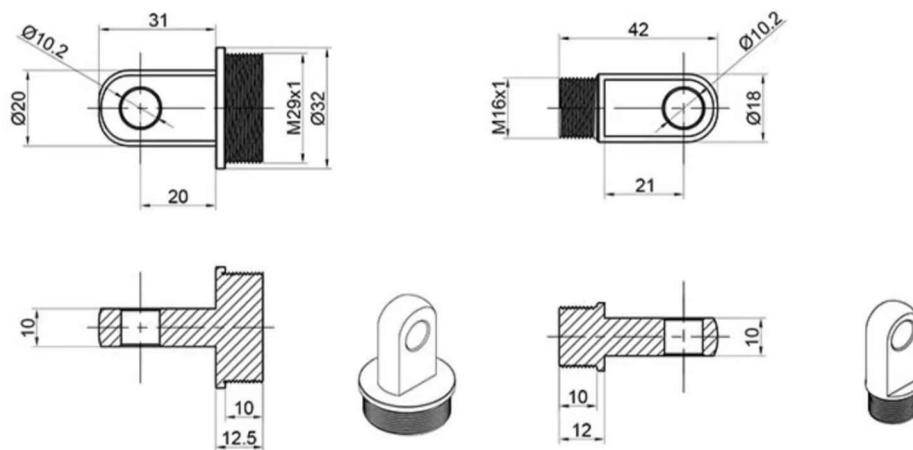


Connector ②:

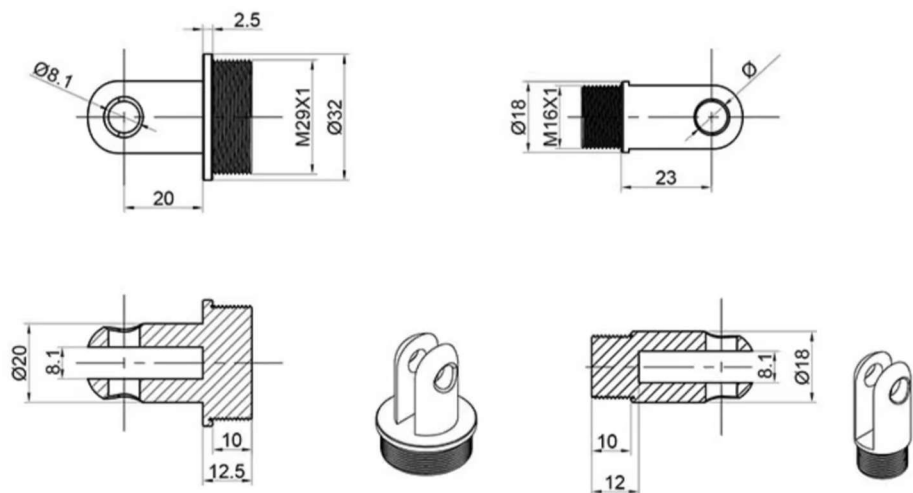

Connector ③:

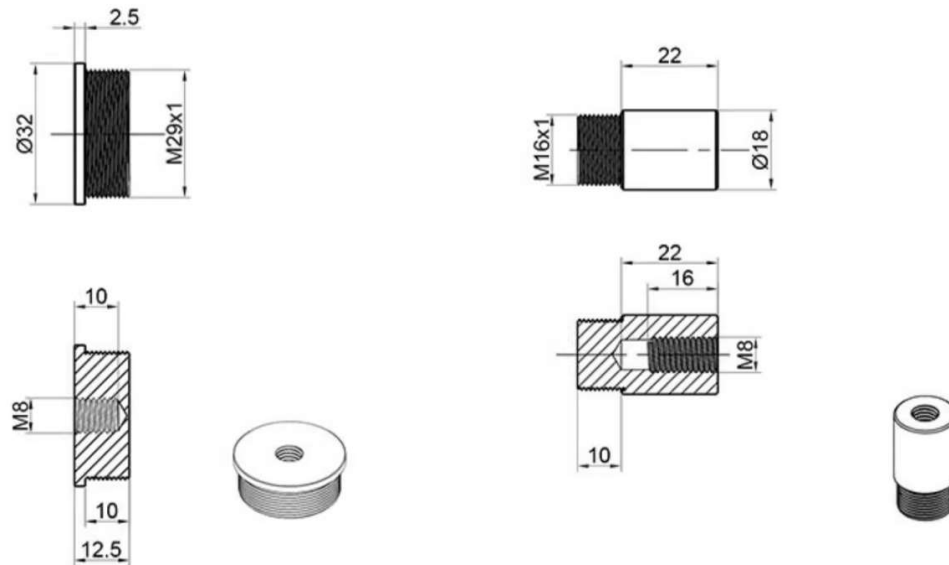

Connector 4:

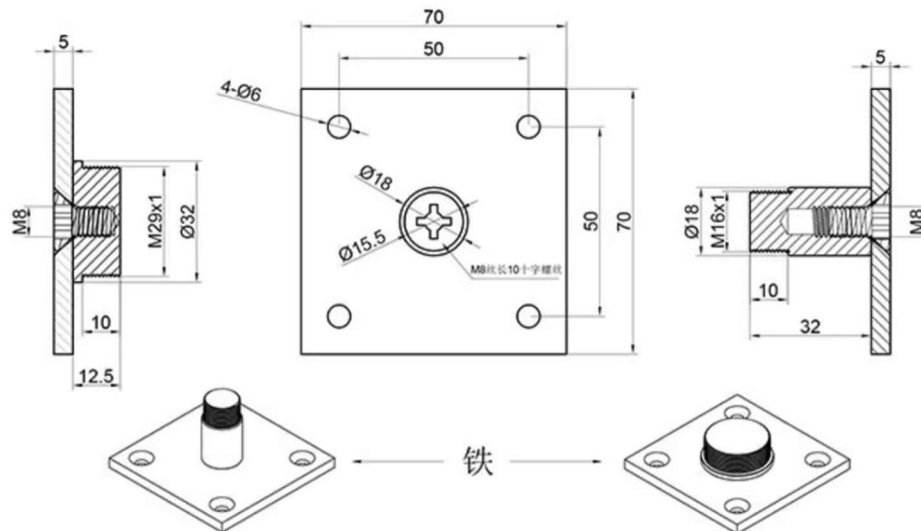

Support

Email: sales@fandeei.com

T/WhatsApp: +8615902990387