


Specifications

Model	Rated Voltage (V)	Rated Load (N)	Speed (mm/s) $\pm 10\%$		Current (A)		Overcurrent Limit (A)	IP Rating	Material
			No-load	Load	No-load	Load			
SL-LA-16-A	12	20	25	20	0.28	0.5	0.64	IP65	Stainless Steel / Copper Alloy
SL-LA-16-B	12	80	8	6	0.28	0.5	0.64	IP65	Stainless Steel / Copper Alloy
SL-LA-16-C	12	200	2	1	0.28	0.5	0.64	IP65	Stainless Steel / Copper Alloy

Dimension

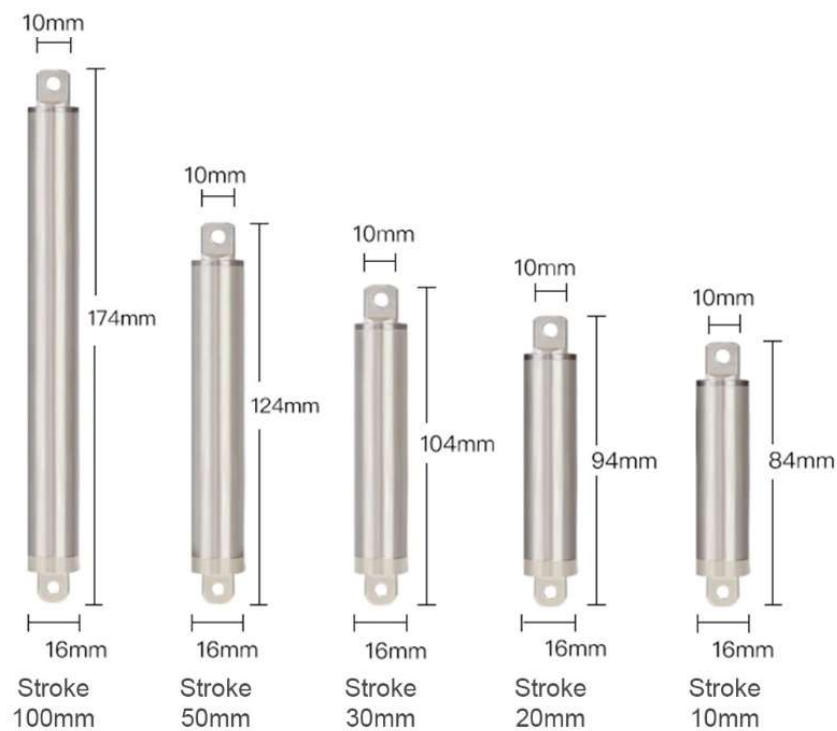

Stroke	Close Length	Open Length	Weight
10mm	84mm	94mm	77.8g
20mm	94mm	114mm	80.8g
30mm	104mm	134mm	87.4g
50mm	124mm	174mm	93.6g
100mm	174mm	274mm	132.2g

The stroke can be customized according to the requirement.

Support

Email: sales@fandeeii.com

T/WhatsApp: +8615902990387